

Lecture 6: Amplitude Modulation (QAM, SSB, VSB and Analog TV)

Dr. Mohammed Hawa
Electrical Engineering Department
University of Jordan

EE421: Communications I

Orthogonality

- In Modulation:
 - **QAM modulation** (sin/cos)
 - Used in DVB, Wi-Fi, WiMAX, 3G, 4G LTE
- In Multiplexing:
 - **CDMA** (Walsh codes, GOLD codes)
 - Used in 3G cellular telephony
 - **OFDMA** (multiple cosines)
 - Used in Wi-Fi, WiMAX, 4G LTE




Copyright © Dr. Mohammed Hawa


Electrical Engineering Department, University of Jordan


2

QAM (Quadrature Amplitude Modulation)

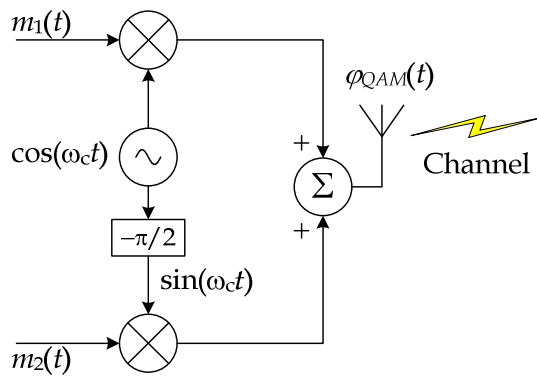


$$\phi_{QAM}(t) = m_1(t) \cos(\omega_c t) + m_2(t) \sin(\omega_c t)$$

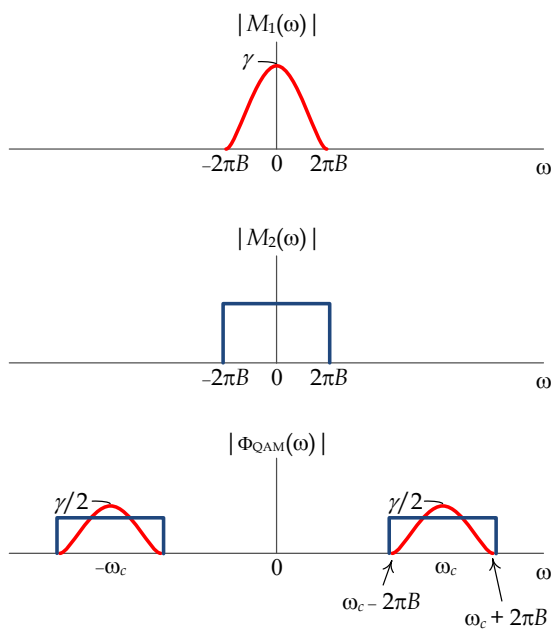

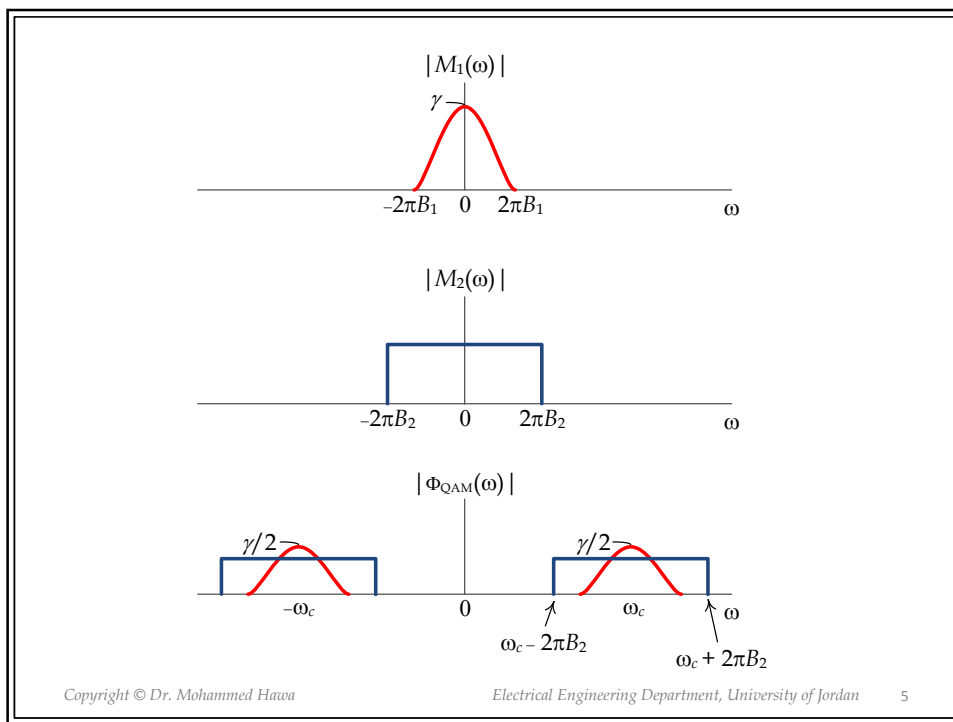

QAM Transmitter and Receiver

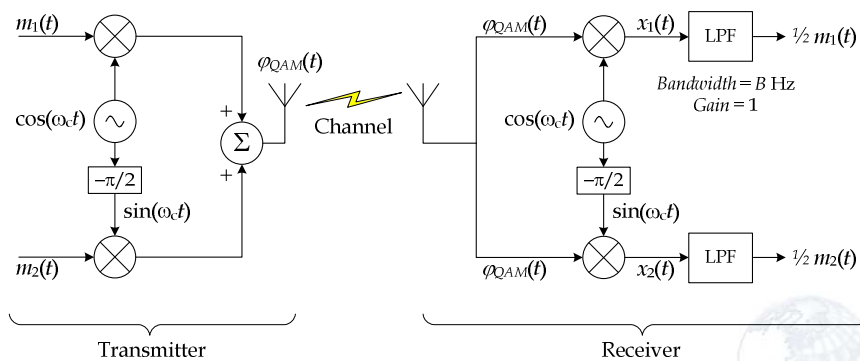

QAM vs. DSB-SC

- **Advantages of QAM:**
 - QAM is more bandwidth efficient than DSB-SC, allowing us to send two signals on the same channel (of bandwidth $2B$).
- **Disadvantages of QAM:**
 - Only synchronous demodulation is possible (cannot use the cheaper Asynchronous detector).
 - When synchronous detection is used for QAM with errors in synchronization, attenuation, distortion and **co-channel interference** show up.

Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan

7

Applications


- Analog QAM is used to carry *chrominance* (color) information in Analog TV broadcasting.
- Digital QAM (to be discussed later) is very popular nowadays: DVB, DAB, Wi-Fi, WiMAX, 3G, 4G, ADSL, etc.
- DSB-SC is used in analog instrumentation, and as part of multiplexing in Stereo FM broadcasting.

Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan


8

SSB-SC (USB) Modulation

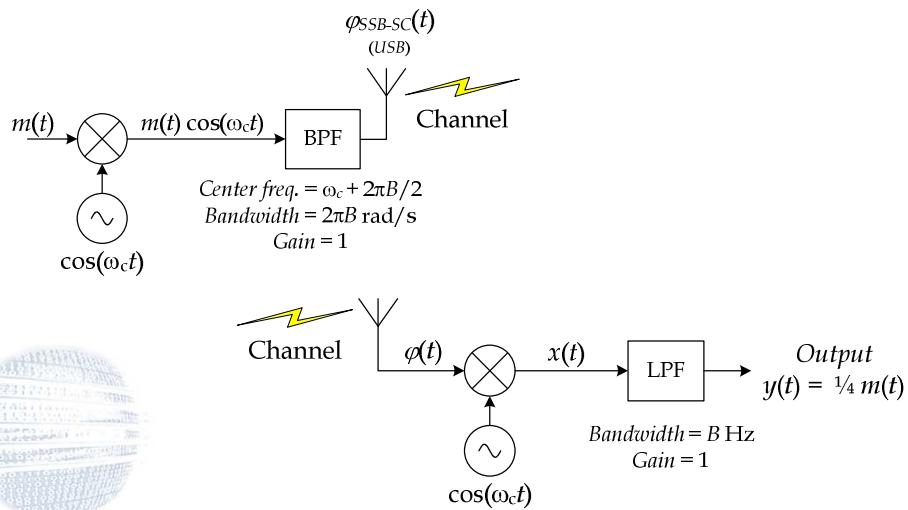


Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 9

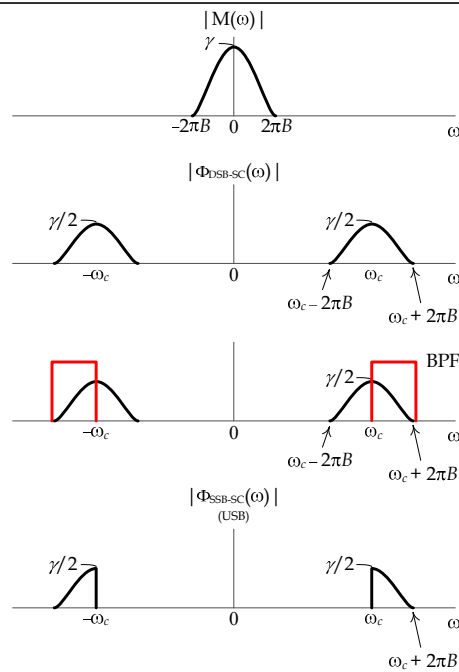



Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 10

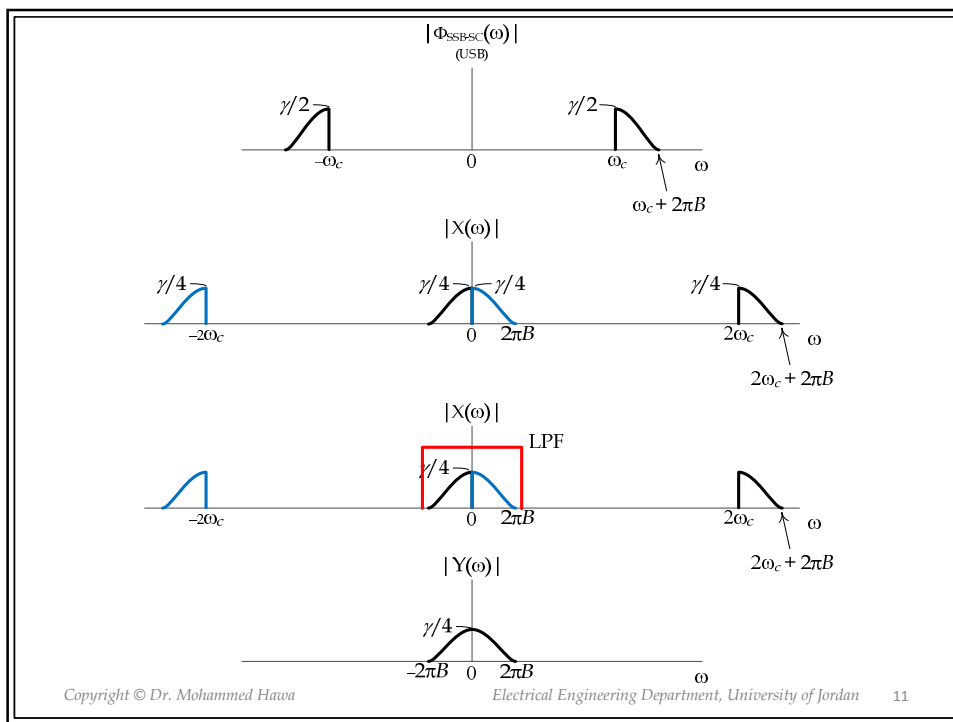




VSB-SC (USB) Transmitter

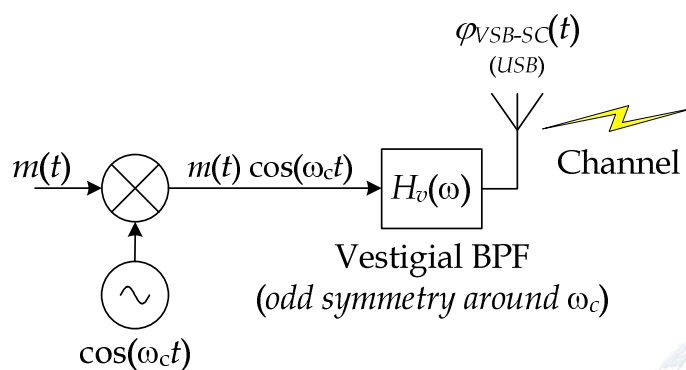

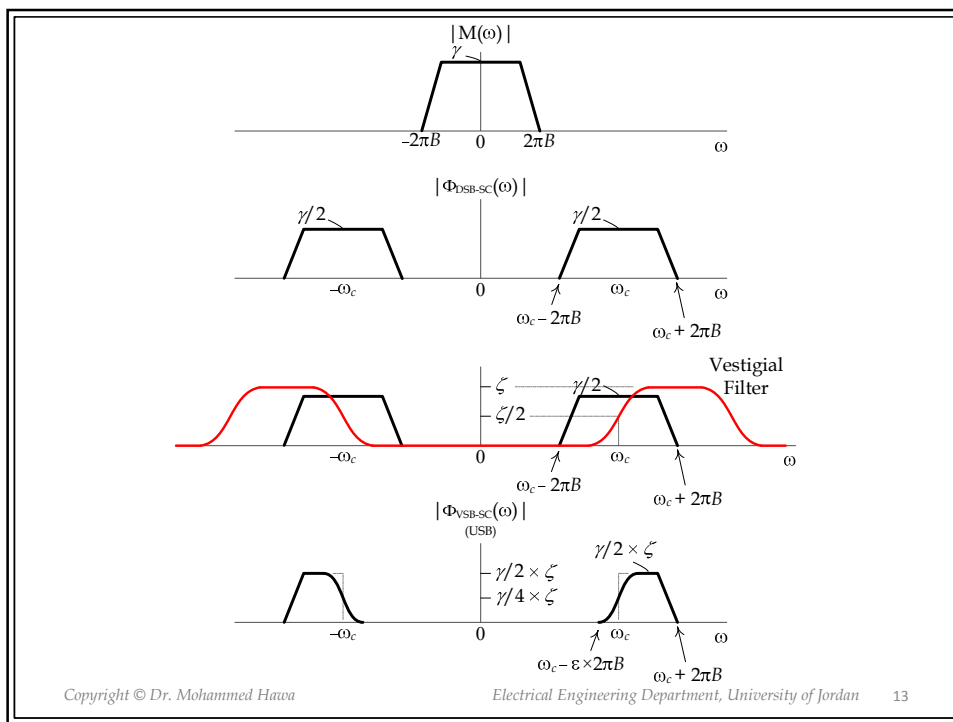

VSB-SC (USB) Receiver

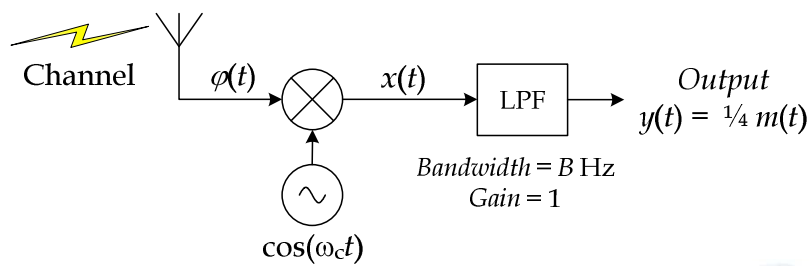

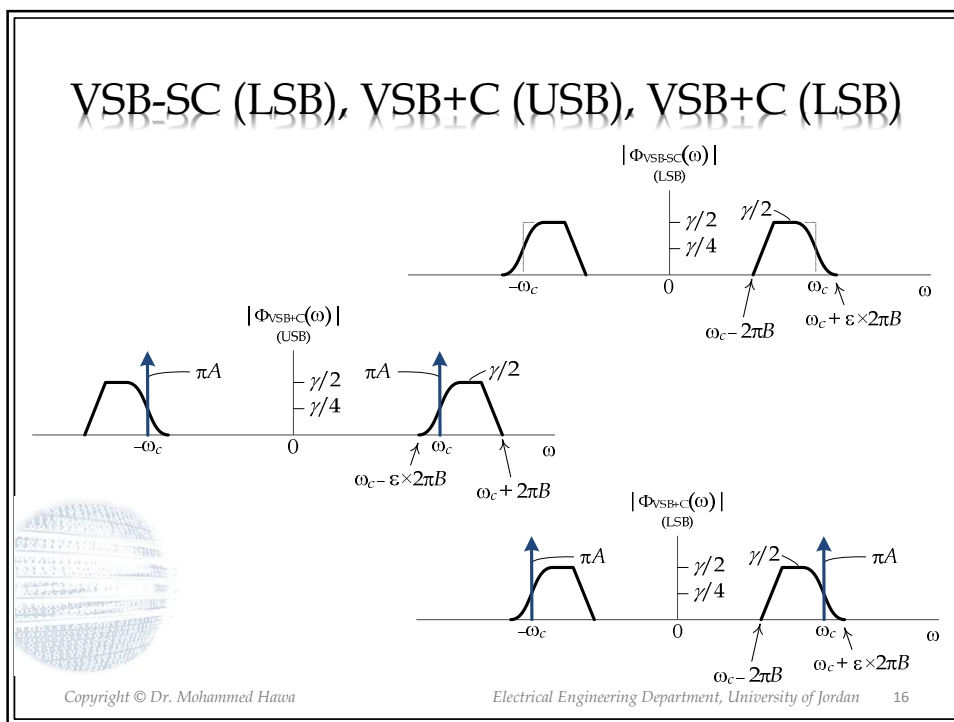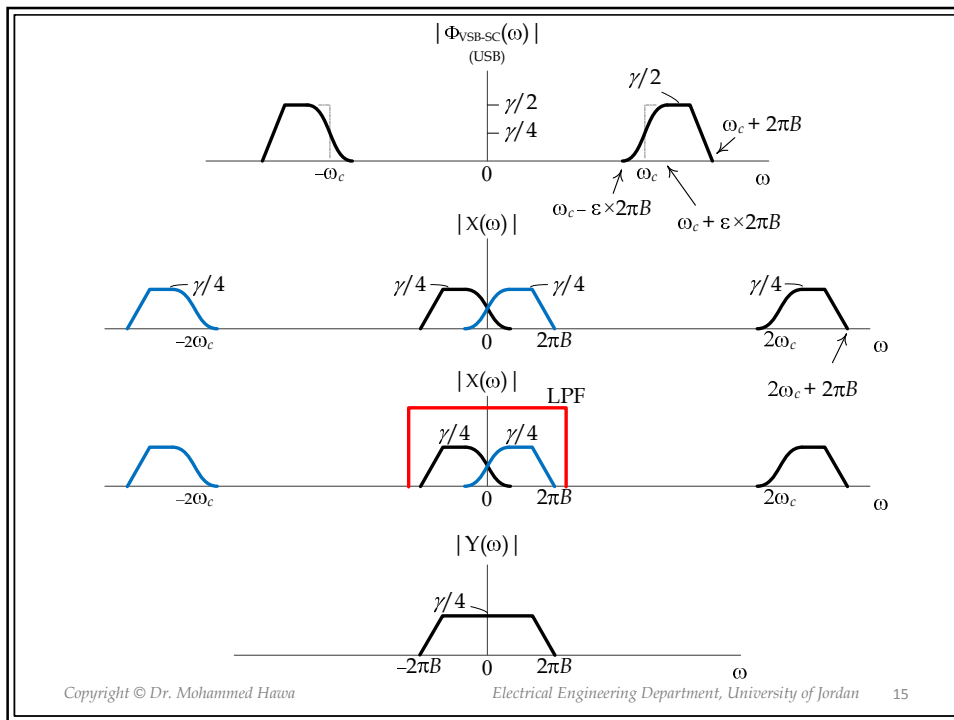

VSB

- **Advantages of VSB:**
 - Simple to generate (no need for sharp filters).
 - Can vary the VSB filter bandwidth (flexibility).
 - VSB transmission bandwidth is smaller than DSB.
 - Smaller bandwidth means more immunity to frequency-selective fading compared to DSB.
 - In case of synchronization errors, VSB-SC suffers less attenuation and distortion compared to DSB-SC.



Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 17

VSB

- **Disadvantages of VSB:**
 - VSB-SC require synchronous detection.
 - VSB+C (which allows envelope detection) is less power efficient compared to AM (since we need $A \gg -m(t)_{\min}$)
- **Applications:**
 - VSB+C is used to send luminance (B & W) information in Analog TV broadcasting.
 - VSB-SC is used in facsimile (fax) machines.



Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 18

Summary

- QAM
 - Bandwidth is $2B$ (but we send two signals)
 - Average power is $\overline{\varphi^2(t)} = \frac{1}{2}\overline{m_1^2(t)} + \frac{1}{2}\overline{m_2^2(t)}$
- SSB-SC (USB or LSB)
 - Bandwidth is B (one signal)
 - Average power is $\overline{\varphi^2(t)} = \frac{1}{4}\overline{m^2(t)}$
- VSB-SC (USB or LSB)
 - Bandwidth is $(1 + \epsilon)B$ (one signal)
 - Average power is $\overline{\varphi^2(t)} = \frac{1}{4}\overline{m^2(t)}$



Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 19

Analog Television Standards


	U.S. Standard	European Standard
Analog TV	<p>NTSC: National Television System Committee (VSB+C, QAM, FM; FDM)</p>	<p>PAL: Phase Alternating Line (VSB+C, QAM, FM; FDM)</p>
Digital TV	<p>ATSC: Advanced Television System Committee (MPEG-2; VSB-8 or QAM; TDM+FDM)</p>	<p>DVB-T, DVB-S, DVB-S2, ...: Digital Video Broadcasting (MPEG-2; QPSK, QAM; TDM+FDM)</p>



Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 20

Analog Television (PAL/NTSC)

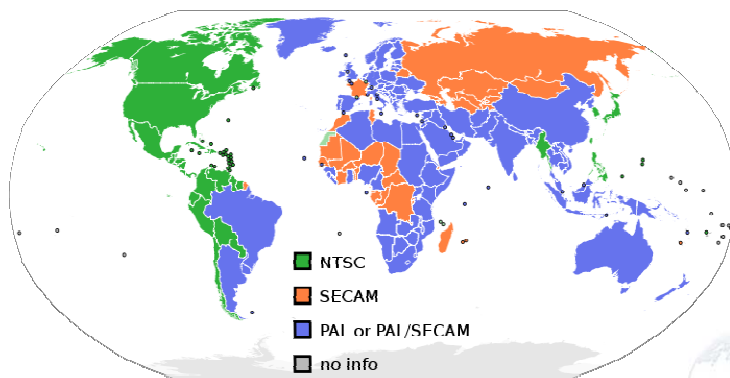


Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 21

Television and Pixels




One pixel is three subpixels



Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 22


Scanning Lines and Resolution

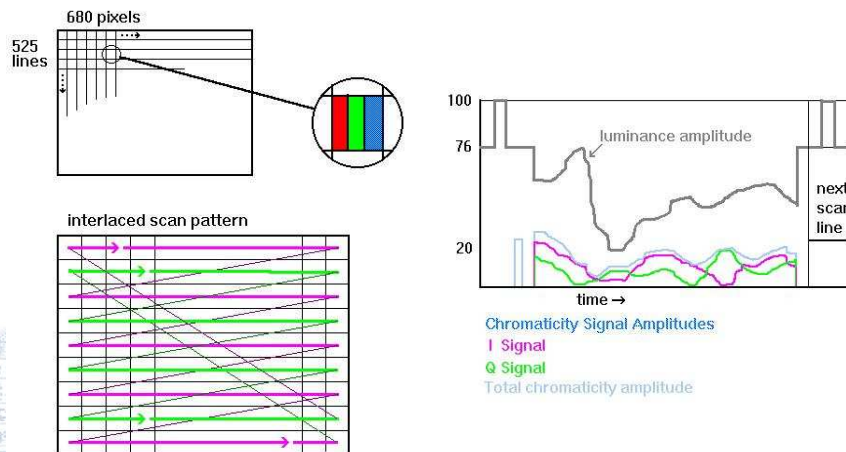

Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 23

Analog Television (PAL/NTSC)

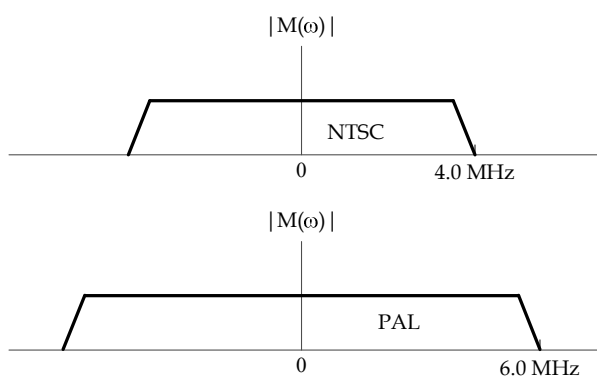

Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 24

Standard Definition (SDTV)


Resolution		Aspect ratio	Pixel shape	Form of scanning	Frame Rate (Hz)
Vertical	Horizontal				
480	640	4:3	square	interlaced	30 (60 fields/s)
				progressive	24 30 60
	704	4:3 or 16:9	non-square	interlaced	30 (60 fields/s)
				progressive	24 30 60

- Many other profiles and frame rates are supported by ATSC and DVB, but the above are the most popular and the most likely to be supported by a digital TV set (monitor). The monitor profile name is called 480i and 480p.

High Definition (HDTV)

Resolution		Aspect ratio	Pixel shape	Form of scanning	Frame Rate (Hz)
Vertical	Horizontal				
720	1280	16:9	square	progressive	24 30 60
					1080
2160	3840	16:9	square	progressive	
				2160	3840


Luminance & Chrominance

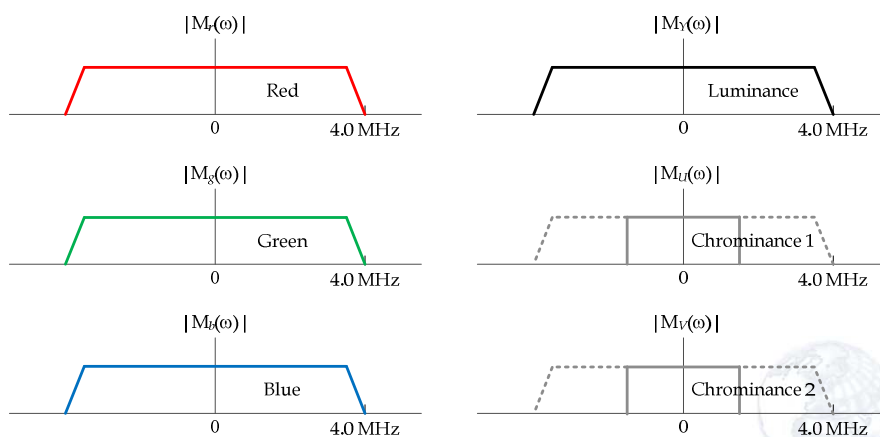

Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 27

RGB to YUV

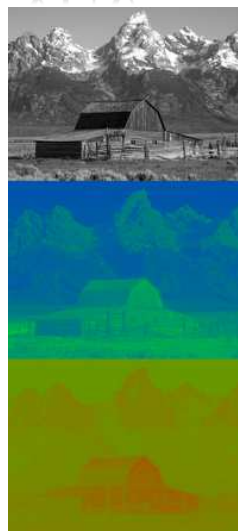

Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 28

RGB to YUV Transformation

$$\begin{bmatrix} Y' \\ U \\ V \end{bmatrix} = \begin{bmatrix} 0.299 & 0.587 & 0.114 \\ -0.14713 & -0.28886 & 0.436 \\ 0.615 & -0.51499 & -0.10001 \end{bmatrix} \begin{bmatrix} R \\ G \\ B \end{bmatrix}$$


$$\begin{bmatrix} R \\ G \\ B \end{bmatrix} = \begin{bmatrix} 1 & 0 & 1.13983 \\ 1 & -0.39465 & -0.58060 \\ 1 & 2.03211 & 0 \end{bmatrix} \begin{bmatrix} Y' \\ U \\ V \end{bmatrix}$$

See <http://en.wikipedia.org/wiki/YUV> for more details.

Noticeable only in sharp images




Analog TV(VSB+C & FM & QAM)

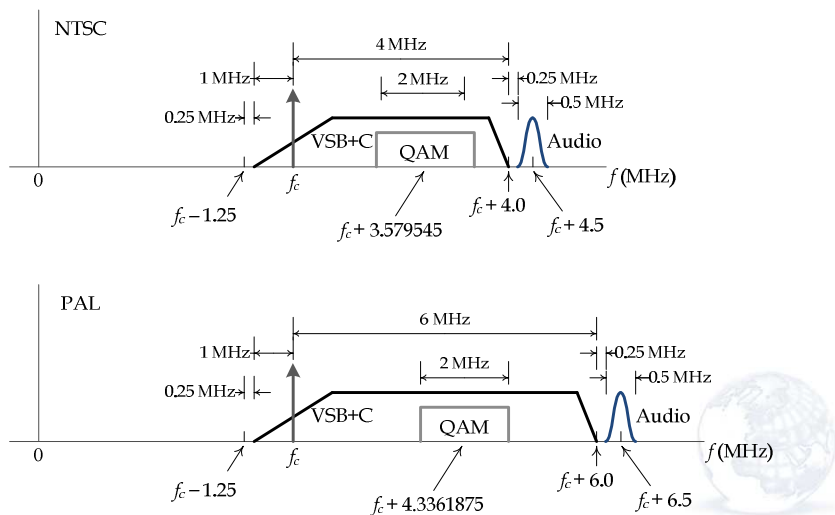

Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 31

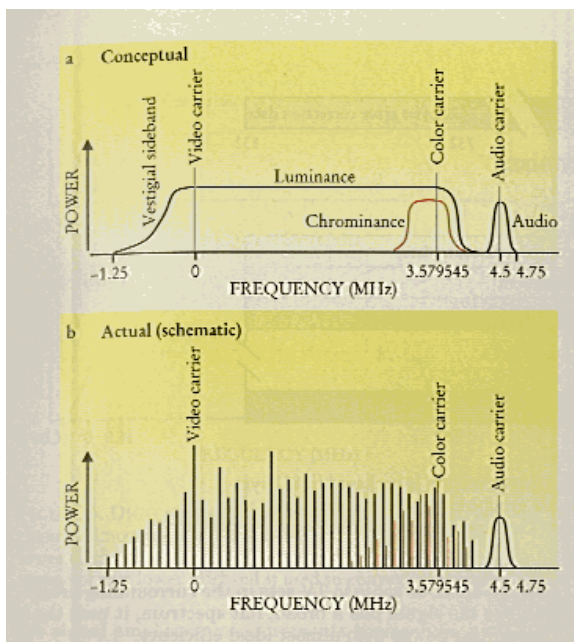

Copyright © Dr. Mohammed Hawa

Electrical Engineering Department, University of Jordan 32